


| Material | |
|------------------------|------------------------------------|
| Contact Solder Pin: | Brass, Tin Plated |
| Wire Retention Spring: | Stainless Steel |
| Insulating Body: | Polyamide, UL94V-0 |
| Electrical | |
| Voltage Rating: | 300 VAC |
| Current rating: | 10 AMPS |
| Withstand Voltage: | 1500 VAC, Test time 60 sec |
| Wire Range: | 14-24 AWG |
| Mechanical | |
| Operating Temperature: | -40°C to +105°C -40°F to +221°F |
| Soldering Temperature: | 260°C, 500°F for 5 seconds |
| Safety Approval: | CULUS |

N=Number of Positions

Part Number Configuration.

EB1083-XX-502


Number of Positions Color Option
5 5-Green

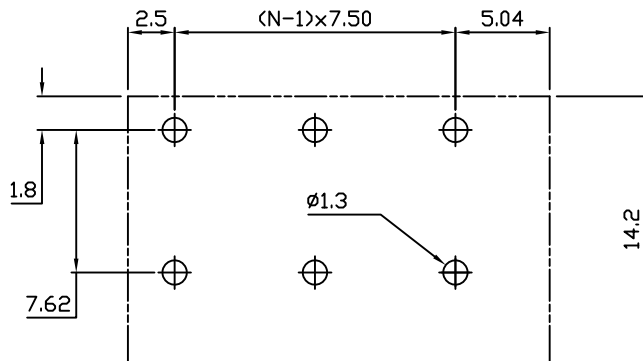

PCB Layout

(Other Color Options Available)
(Please consult Factory)

MAX NUMBER OF POSITIONS = 16

| | | |
|----------------------------------------------------------------------------------------------|-----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| UNLESS OTHERWISE SPECIFIED BREAK ALL SHARP EDGES AND DEBURR ALL HOLES | TITLE: 7.50mm SPACING, SCREWLESS BLOCK | |
| LIMITS: UNLESS OTHERWISE SPECIFIED HUND.±.02 FRACT.±1/64 THOU.±.005 ANGLE±1° | SCALE | THIS IS A CONFIDENTIAL DRAWING AND MUSTBE TREATED AS SUCH. NO DISTRIBUTION IS ALLOWED WITHOUT WRITTEN APPROVAL BY EBY ELECTRO INC. |
| | |  EBY Electro Inc. PLAINVIEW, NY 11803 |

IMPORTANT DISCLAIMER: All information provided on this print is for reference. Always perform your own tests and acquire samples and further information to determine product suitability. While we make effort to provide accurate information, we cannot be responsible for errors either of omission or typographical. EBY Electro, Inc. assumes no responsibility for the use or suitability of any product. All products and specifications are subject to change without prior written notice.

METRIC LIMITS
ONE PLACE ±0.3
TWO PLACES ±0.10
ANGLE ±1°

DRAWN JM DATE 05/09/08
CHECKED DATE DATE
APPROVED DATE

SIZE A DRAWING NUMBER: EB1083-XX-502 REV. E