
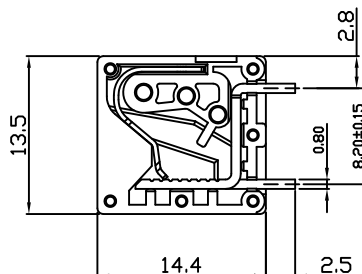


Poles	Tolerance
1p-6p	±0.10
7p-12p	±0.20
13p-18p	±0.30
19p-24p	±0.40



Material:	
Contact Solder Pin:	Brass, Tin Plated
Wire Retention Spring:	Stainless Steel
Insulating Body:	Polyamide, UL94V-0
Electrical	
Voltage Rating:	300 VAC
Current rating (solid):	13 AMPS
Current rating (stranded):	16 AMPS
Withstand Voltage:	1500 VAC, Test time 60 sec
Wire Range (solid):	14-24 AWG
Wire Range (stranded):	12-24 AWG
Mechanical	
Operating Temperature:	-40°C to +115°C -40°F to +239°F
Soldering Temperature:	260°C, 500°F for 5 seconds
Safety Approval:	CSA US

N=Number of Positions


Part Number Configuration.

EB1087-XX-X02

Number of Positions

Color Option:

- 0-Black
- 2-Red
- 3-Orange
- 4-Yellow
- 5-Green
- 6-Blue
- 8-Gray
- 9-White

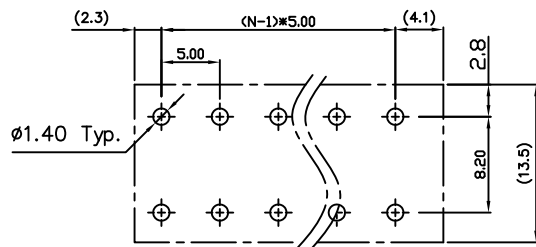

P.C.B. Layout

Max Number of Positions = 24

UNLESS OTHERWISE SPECIFIED BREAK ALL SHARP EDGES AND DEBURR ALL HOLES  
 TITLE: 5.00mm SPACING, SCREWLESS BLOCK VERTICAL ALIGNMENT

LIMITS: UNLESS OTHERWISE SPECIFIED  
 HUND.±.02 FRACT.±1/64 THOU.±.005 ANGLE±1°

SCALE THIS IS A CONFIDENTIAL DRAWING AND MUSTBE TREATED AS SUCH. NO DISTRIBUTION IS ALLOWED WITHOUT WRITTEN APPROVAL BY EBYP ELECTRO INC.



IMPORTANT DISCLAIMER: All information provided on this print is for reference. Always perform your own tests and acquire samples and further information to determine product suitability. While we make effort to provide accurate information, we cannot be responsible for errors either of omission or typographical. EBYP Electro, Inc. assumes no responsibility for the use or suitability of any product. All products and specifications are subject to change without prior written notice.

METRIC LIMITS  
 ONE PLACE ±0.3  
 TWO PLACES ±0.10  
 ANGLE ± 1°

DRAWN AJT DATE 08/03/16  
 CHECKED DATE  
 APPROVED DATE

SIZE A

DRAWING NUMBER: EB1087-XX-X02

REV.