

RoHS Compliant

Rev.

ECO#

Date




By

G


1583-0724

07/17/24

MWP

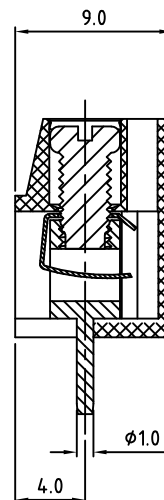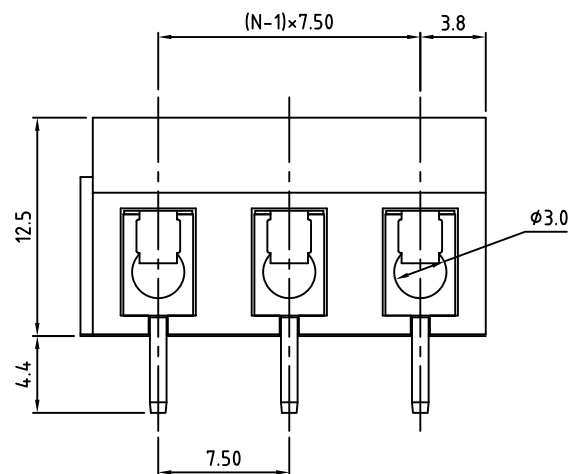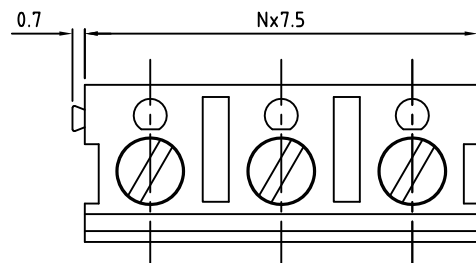

N=Number of Positions

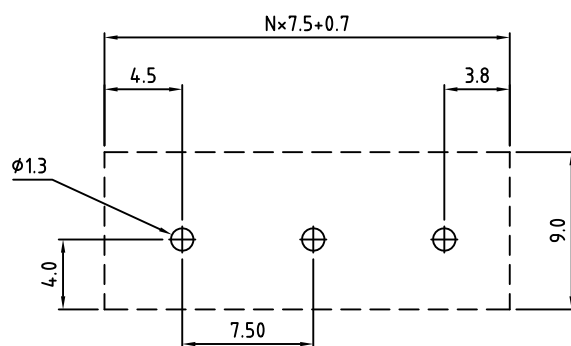

Recommended P.C.B. Layout

## Material:

Contact Solder Pin: Brass, Tin Plated

Wire Guard: Stainless Steel

Screw: M3, Steel, Zinc Plated, "-" slotted

Insulating Body: Polyamide, UL94V-0

## Electrical

Voltage Rating: 300 VAC

Current rating: 15 AMPS

Withstand Voltage: 1500 VAC, Test time 60 sec

Wire Range: 14-22 AWG

## Mechanical

Torque: 3.5 Lbs-in. Max

Operating Temperature: -40°C to +115°C  
-40°F to +239°F

Soldering Temperature: 260°C, 500°F for 5 seconds

Safety Approval:  US

## Part Number Configuration.

EB110-XXDS-X00

Number of Positions: 0-Black  
2-Red  
5-Green  
6-Blue  
8-Gray(Other Color Options Available)  
Please consult Factory

Max Number of Positions = 16

All Dimensions in Millimeters

TITLE: 7.50mm SPACING, WIRE GUARD BLOCK

METRIC LIMITS  
ONE PLACE  $\pm 0.3$   
TWO PLACES  $\pm 0.10$   
ANGLE  $\pm 1^\circ$ 

SCALE

THIS IS A CONFIDENTIAL DRAWING AND  
MUST BE TREATED AS SUCH. NO  
DISTRIBUTION IS ALLOWED WITHOUT  
WRITTEN APPROVAL BY EBY ELECTRO INC.**Amphenol**  
Electro Inc.  
PLAINVIEW, NY 11803DRAWN MWP  
CHECKEDDATE 10/17/02  
DATESIZE  
A

DRAWING NUMBER:

EB110-XXDS-X00

REV.  
G

IMPORTANT DISCLAIMER: All information provided on this print is for reference. Always perform your own tests and acquire samples and further information to determine product suitability. While we make effort to provide accurate information, we cannot be responsible for errors either of omission or typographical. EBY Electro, Inc. assumes no responsibility for the use or suitability of any product. All products and specifications are subject to change without prior written notice.