

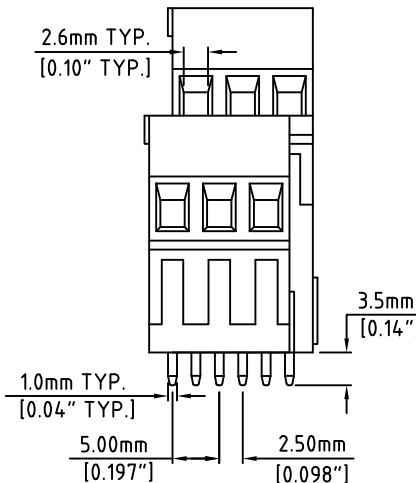


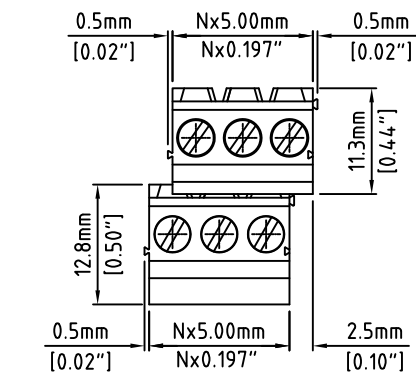

N=Number of Positions

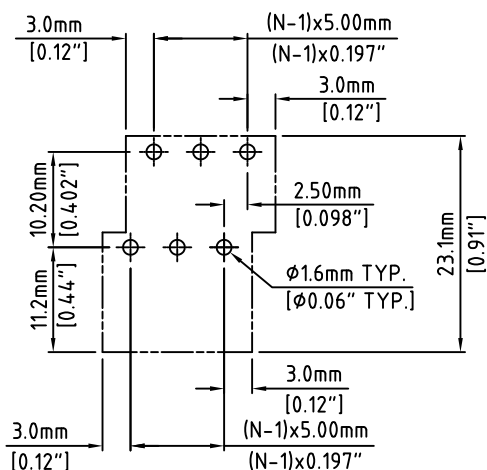

P.C.B. Layout

RoHS Compliant

Rev.

Description/Eco

Date

By

Material:


Contact Block:	Brass, Ni Plated
Contact Solder Pin:	Brass, Tin Plated
Screw:	M2.5, Steel, Zinc Plated, "-" slotted
Insulating Body:	Polyamide, UL94V-0, Green

Electrical

Voltage Rating:	300 VAC
Current rating:	10 AMPS
Withstand Voltage:	1500 VAC, Test time 60 sec
Wire Range:	14-24 AWG

Mechanical

Torque:	3.5 lbs-in. Max
Operating Temperature:	-40°C to +105°C -40°F to +221°F
Soldering Temperature:	260°C, 500°F for 5 seconds
Safety Approval:	UL US

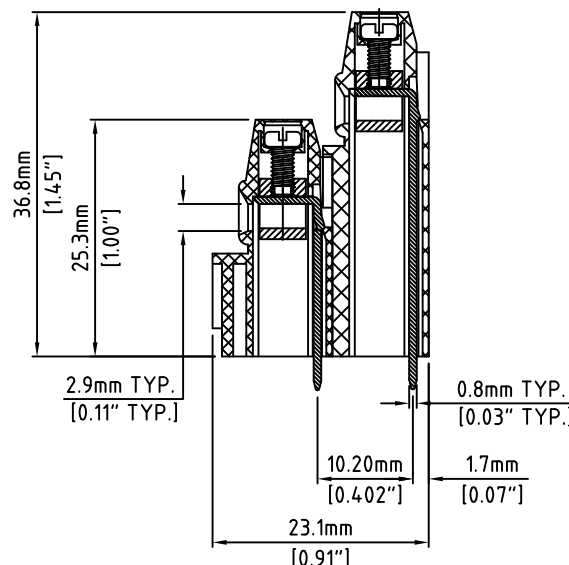

Part Number Configuration.

EB1216L-XX-500

Number of Positions: 12
 Color: 5-Green

(Other Color Options Available)
 Please consult Factory

Max Number of Positions = 24

UNLESS OTHERWISE SPECIFIED BREAK ALL SHARP EDGES AND DEBURR ALL HOLES

TITLE: 5.00mm SPACING, CAGE CLAMP HEADER DUAL TIER, LEFT ORIENTED

LIMITS: UNLESS OTHERWISE SPECIFIED
 HUND.±0.02 FRACT.±1/64
 THOU.±0.005 ANGLE±1°

SCALE: THIS IS A CONFIDENTIAL DRAWING AND MUSTBE TREATED AS SUCH. NO DISTRIBUTION IS ALLOWED WITHOUT WRITTEN APPROVAL BY EBY ELECTRO INC.

EBY Electro Inc.
 PLAINVIEW, NY 11803

IMPORTANT DISCLAIMER: All information provided on this print is for reference. Always perform your own tests and acquire samples and further information to determine product suitability. While we make effort to provide accurate information, we cannot be responsible for errors either of omission or typographical. EBY Electro, Inc. assumes no responsibility for the use or suitability of any product. All products and specifications are subject to change without prior written notice.

METRIC LIMITS
 ONE PLACE ±0.3
 TWO PLACES ±0.10
 ANGLE ±1°

DRAWN: JM
 CHECKED: _____
 APPROVED: _____
 DATE: 10/28/08
 DATE: _____
 DATE: _____

SIZE: A
 DRAWING NUMBER: EB1216L-XX-500
 REV.: