




RoHS Compliant

Rev.	ECO#	Date	By
H	1130-0616	06/28/16	MWP

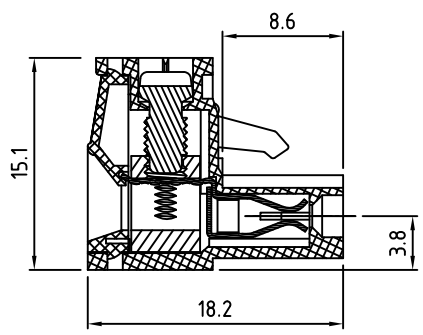


N=Number of Positions

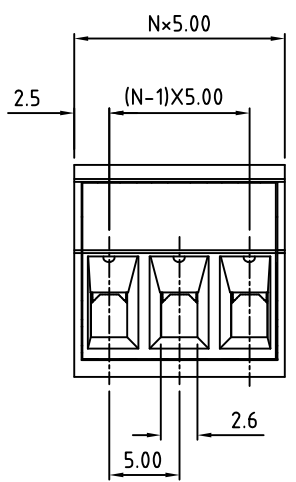

Material:	
Contact Block:	Brass Machined, 160-240µ" Nickel Plated
Wire Guard:	PhBz, Tin Plated
Screw:	M3.0, Steel, Zinc Plated, "-" slotted
Insulating Body:	Polyamide, UL94V-0
Electrical	
Voltage Rating:	300 VAC / 300 VAC
Current rating:	20 AMPS / 20 AMPS
Withstand Voltage:	1500 VAC / 2500 VAC, Test time 60 sec
Wire Range:	12-24 AWG
Mechanical	
Torque:	5.0 lbs-in. / 0.5 Nm Max
Operating Temperature:	-40°C to +115°C -40°F to +239°F
Safety Approval:	/

Part Number Configuration.

EB1500-XX-XX0

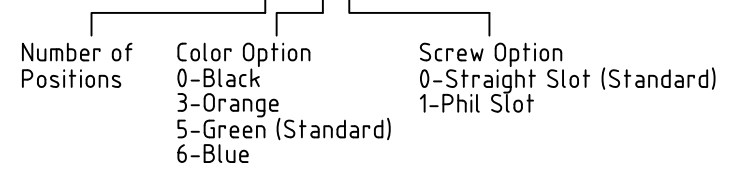

Max Number of Positions = 24

UNLESS OTHERWISE SPECIFIED BREAK ALL SHARP EDGES AND DEBURR ALL HOLES	TITLE: 5.00mm SPACING, PLUGGABLE BLOCK
---	--

LIMITS: UNLESS OTHERWISE SPECIFIED HUND.±.02 FRACT.±1/64 THOU.±.005 ANGLE±1°	SCALE	THIS IS A CONFIDENTIAL DRAWING AND MUSTBE TREATED AS SUCH. NO DISTRIBUTION IS ALLOWED WITHOUT WRITTEN APPROVAL BY EBYP ELECTRO INC.	PLAINVIEW, NY 11803
--	-------	---	---------------------

IMPORTANT DISCLAIMER: All information provided on this print is for reference. Always perform your own tests and acquire samples and further information to determine product suitability. While we make effort to provide accurate information, we cannot be responsible for errors either of omission or typographical. EBYP Electro, Inc. assumes no responsibility for the use or suitability of any product. All products and specifications are subject to change without prior written notice.	METRIC LIMITS ONE PLACE ±0.3 TWO PLACES ±0.10 ANGLE ± 1°	DRAWN <u> </u> MWP	DATE <u>10/14/02</u>	SIZE A	DRAWING NUMBER: EB1500-XX-XX0	REV.
	CHECKED <u> </u>	DATE <u> </u>	H			
	APPROVED <u> </u>	DATE <u> </u>				