



N=Number of Positions




Material:	
Contact Block:	Brass, Nickel Plated
Contact Clip:	PhBz (CuSn), Tin Plated
Screw:	M3, Steel, Zinc Plated, "-" slotted
Insulating Body:	Polyamide, UL94V-0, Green
Electrical	
Voltage Rating:	300 VAC
Current rating:	20 AMPS
Withstand Voltage:	1500 VAC, Test time 60 sec
Wire Range:	12-24 AWG
Mechanical	
Torque:	5.0 lbs-in. Max
Operating Temperature:	-40°C to +105°C -40°F to +221°F
Safety Approval:	UL US

Part Number Configuration.

EB1509-XX-500

Number of  
Positions

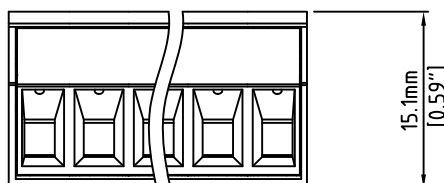

(Other Color Options Available)  
(Please consult Factory)

Max Number of Positions = 24

UNLESS OTHERWISE  
SPECIFIED BREAK ALL  
SHARP EDGES AND  
DEBURR ALL HOLES

TITLE:

5.08mm SPACING, PLUGGABLE BLOCK

LIMITS: UNLESS  
OTHERWISE SPECIFIED  
HUND.±.02 FRACT.±1/64  
THOU.±.005 ANGLE±1°

SCALE

THIS IS A CONFIDENTIAL DRAWING AND  
MUSTBE TREATED AS SUCH. NO  
DISTRIBUTION IS ALLOWED WITHOUT  
WRITTEN APPROVAL BY EBY ELECTRO INC.

**EBY** Electro Inc.  
PLAINVIEW, NY 11803

IMPORTANT DISCLAIMER: All information provided on this print is for reference. Always perform your own tests and acquire samples and further information to determine product suitability. While we make effort to provide accurate information, we cannot be responsible for errors either of omission or typographical. EBY Electro, Inc. assumes no responsibility for the use or suitability of any product. All products and specifications are subject to change without prior written notice.

METRIC LIMITS  
ONE PLACE ±0.3  
TWO PLACES ±0.10  
ANGLE ± 1°

DRAWN JM  
CHECKED \_\_\_\_\_  
APPROVED \_\_\_\_\_

DATE 10/29/09  
DATE \_\_\_\_\_  
DATE \_\_\_\_\_

SIZE  
A

DRAWING NUMBER:  
EB1509-XX-500

REV.