


12.5mm [0.49"] 8.8mm [0.35"]


Material:	
Contact Block:	Brass, Ni Plated
Contact Clip:	PhBz, Tin Plated
Screw:	M3, Steel, Zinc Plated, "-" slotted
Insulating Body:	Polyamide, UL94V-0, Green
Electrical	
Voltage Rating:	300 VAC
Current rating:	15 AMPS
Withstand Voltage:	1500 VAC, Test time 60 sec
Wire Range:	12-24 AWG
Mechanical	
Torque:	5.0 lbs-in. Max
Operating Temperature:	-40°C to +105°C -40°F to +221°F
Safety Approval:	c 🔁 us

Part Number Configuration.



(Other Color Options Available)
Please consult Factory

## N=Number of Positions

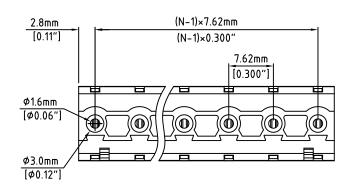

## Max Number of Positions = 16

UNLESS OTHERWISE SPECIFIED BREAK ALL SHARP EDGES AND DEBURR ALL HOLES

DATE

DATE

DATE 02/16/06

7.62mm SPACING, PLUGGABLE BLOCK HOOK ON BACK SIDE

LIMITS: UNLESS OTHERWISED SPECIFIED HUND.±.02 FRACT.±1/64 ANGLE±1° THOU.±.005

SCALE THIS IS A CONFIDENTIAL DRAWING AND MUSTBE TREATED AS SUCH. NO DISTRIBUTION IS ALLOWED WITHOUT WRITTEN APPROVAL BY EBY ELECTRO INC Electro Inc. PLAINVIEW, NY 11803

IMPORTANT DISCLAIMER: All information provided on this print is for reference. Always perform your own tests and acquire samples | METRIC LIMITS and further information to determine product suitability. While we make effort to provide accurate information, we cannot be ONE PLACE #0.3 responsible for errors either of omission or typographical. EBY Electro, Inc. assumes no responsibility for the use or suitability of any product. All products and specifications are subject to change without prior written notice.

MWP DRAWN CHECKED **APPROVED** 

EB1765B-XX-500