
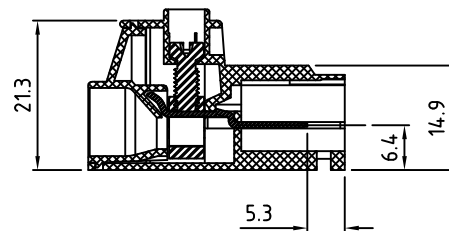


N=Number of Positions

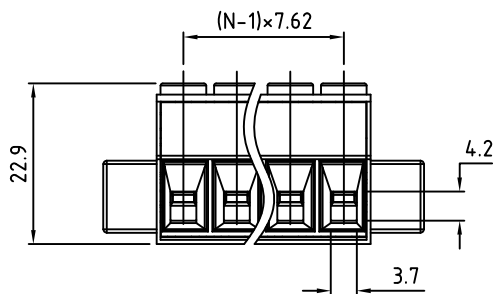

Mates With
EB1788MS-XX-500
EB1788MS-XX-510

Material:	
Contact Block:	Brass, Nickel Plated
Contact Pin:	Copper, Tin Plated
Screw:	M3.5, Steel, Zinc Plated, "-" slotted
Insulating Body:	Polyamide, UL94V-0, Green
Flange Nut:	M3, Steel, Zinc Plated
Electrical	
Voltage Rating:	600 VAC
Current rating:	41 AMPS
Withstand Voltage:	1.6KV
Wire Range:	8-24 AWG
Wire Strip Length:	10-11mm
Mechanical	
Torque:	9.0 lbs-in. Max
Operating Temperature:	-40°C to +115°C
	-40°F to +239°F
Safety Approval:	UL US

Part Number Configuration.

EB1789MN-XX-500

Number of Positions: X
Color: 5-Green

(Other Color Options Available)
(Please consult Factory)

Max Number of Positions = 16

UNLESS OTHERWISE SPECIFIED BREAK ALL SHARP EDGES AND DEBURR ALL HOLES	TITLE:	7.62mm SPACING, PLUGGABLE BLOCK FLAT PIN, MOUNTABLE	
	LIMITS: UNLESS OTHERWISE SPECIFIED ONE PLACE ±0.3 HUND.±0.2 FRACT.±1/64 THOU.±.005 ANGLE±1°	SCALE	THIS IS A CONFIDENTIAL DRAWING AND MUSTBE TREATED AS SUCH. NO DISTRIBUTION IS ALLOWED WITHOUT WRITTEN APPROVAL BY EB Y ELECTRO INC.
DRAWN JM		DATE 08/19/10	 PLAINVIEW, NY 11803
CHECKED		DATE	
APPROVED		DATE	

IMPORTANT DISCLAIMER: All information provided on this print is for reference. Always perform your own tests and acquire samples and further information to determine product suitability. While we make effort to provide accurate information, we cannot be responsible for errors either of omission or typographical. EB Y Electro, Inc. assumes no responsibility for the use or suitability of any product. All products and specifications are subject to change without prior written notice.

METRIC LIMITS ONE PLACE ±0.3 TWO PLACES ±0.10 ANGLE ±1°	DRAWING NUMBER: EB1789MN-XX-500	REV.
--	------------------------------------	------