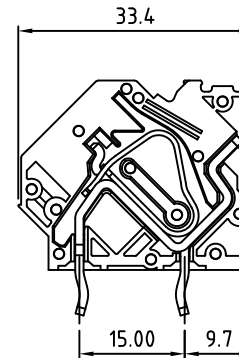

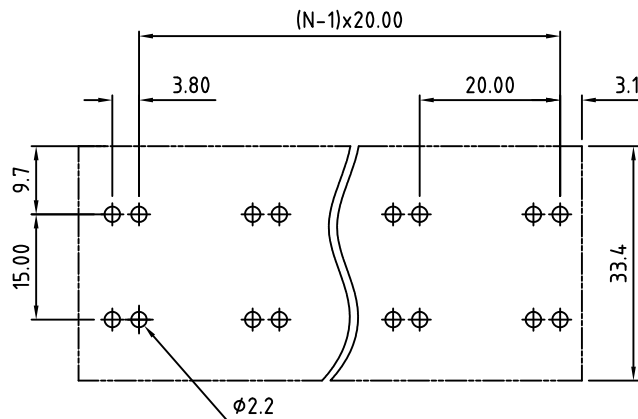


Technical drawing of a rectangular plate with four circular holes and four sets of three vertical slots. The drawing includes the following dimensions:

- Overall width: $(N \times 20.00) - 10.0$
- Overall height: 27.0
- Hole diameter: 10.3
- Slot width: 3.80
- Slot depth: 1.4
- Slot spacing: $(N-1) \times 20.00$



Material:	
Contact Block:	Brass, Tin Plated
Wire Retention Spring:	Stainless Steel
Insulating Body:	Polyamide, UL94V-0
Electrical	
Voltage Rating:	600 VAC
Current rating:	37 AMPS
Withstand Voltage:	1500 VAC, Test time 60 sec
Wire Range:	6-24 AWG
Mechanical	
Operating Temperature:	-40°C to +105°C -40°F to +221°F
Soldering Temperature:	260°C, 500°F for 5 seconds
Safety Approval:	C  US




Part Number Configuration.

EB3560M-XX-803

Number of Positions	Color
8	Grey

(Other Color Options Available)
(Please consult Factory)

Max Number of Positions = 12

UNLESS OTHERWISE SPECIFIED BREAK ALL SHARP EDGES AND DEBURR ALL HOLES	TITLE: 20.00mm SPACING, SCREWLESS BLOCK WITH MOUNTING FLANGE	
LIMITS: UNLESS OTHERWISE SPECIFIED HUND.±.02 FRACT.±.1/64 THOU.±.005 ANGLE±1°	SCALE	THIS IS A CONFIDENTIAL DRAWING AND MUSTBE TREATED AS SUCH. NO DISTRIBUTION IS ALLOWED WITHOUT WRITTEN APPROVAL BY EBY ELECTRO INC.
		 PLAINVIEW, NY 11803

IMPORTANT DISCLAIMER: All information provided on this print is for reference. Always perform your own tests and acquire samples and further information to determine product suitability. While we make effort to provide accurate information, we cannot be responsible for errors either of omission or typographical. EBY Electro, Inc. assumes no responsibility for the use or suitability of any product. All products and specifications are subject to change without prior written notice.

METRIC LIMITS
ONE PLACE ± 0.3
TWO PLACES ± 0.10
ANGLE $\pm 1^\circ$

DRAWN	JM	DATE	11/18/08
CHECKED		DATE	
APPROVED		DATE	

SIZE
A

DRAWING NUMBER:	EB3560M-XX-803
-----------------	----------------

REV.
A