




Rev.	ECO#	Date	Ву
E	798-1113	11/01/13	AJT

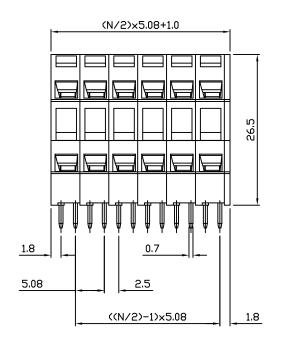

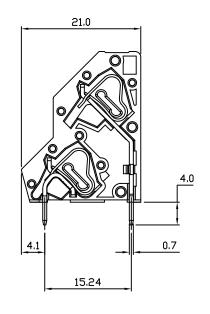


Material:			
Contact Solder Pin:	Brass, Tin Plated		
Wire Retention Spring:	Stainless Steel		
Insulating Body:	Polyamide, UL94V-0		
Electrical			
Voltage Rating:	300 VAC		
Current rating:	10 AMPS		
Withstand Voltage:	1500 VAC, Test time 60 sec		
Wire Range:	12-28 AWG		
Mechanical			
Operating Temperature:	-40°C to +105°C -40°F to +221°F		
Soldering Temperature:	260°C, 500°F for 5 seconds		
Safety Approval:	c <b>SN</b> us		

N=Number of Positions

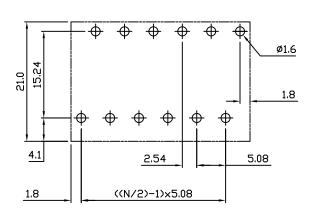

PCB. LAYOUT

Part Number Configuration.



(Other Color Options Available) Please consult Factory

MAX NUMBER OF POSITIONS =  $(2\times24)$  = 48

UNLESS OTHERWISE TITLE: SPECIFIED BREAK ALL SHARP EDGES AND DEBURR ALL HOLES

5.08mm SPACING, SCREWLESS BLOCK

LIMITS: UNLESS SCALE THIS IS A CONFIDENTIAL DRAWING AND OTHERWISED SPECIFIED MUSTBE TREATED AS SUCH. NO HUND.±.02 FRACT.±1/64 DISTRIBUTION IS ALLOWED WITHOUT THOU.±.005 ANGLE±1° WRITTEN APPROVAL BY EBY ELECTRO INC.

DATE

DATE

Electro Inc. PLAINVIEW, NY 11803

IMPORTANT DISCLAIMER: All information provided on this print is for reference. Always perform your own tests and acquire samples | METRIC LIMITS and further information to determine product suitability. While we make effort to provide accurate information, we cannot be ONE PLACE 20.3 responsible for errors either of omission or typographical. EBY Electro, Inc. assumes no responsibility for the use or suitability of any | TWO PLACES ±0.10 product. All products and specifications are subject to change without prior written notice.

DRAWN CHECKED **APPROVED**  DATE 08/02/07 SIZE

EB408-XX-800

REV. Ε