


 RoHS Compliant


Rev.	ECO#	Date	By
D	0224-0912	09/26/12	MWP

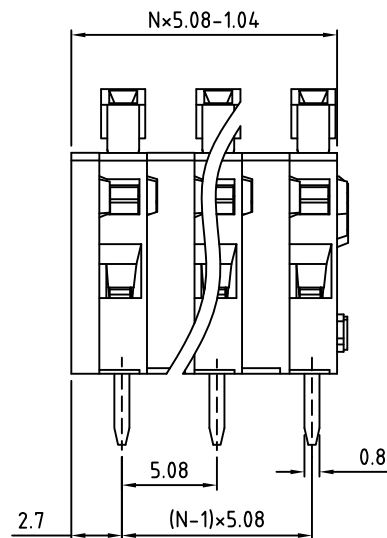


N=Number of Positions

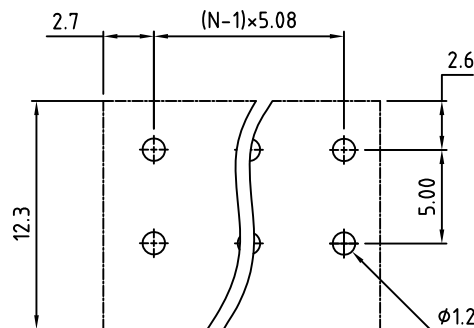

P.C.B. LAYOUT

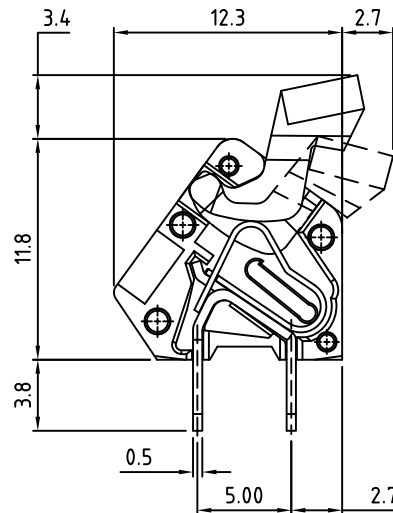

Material:	
Contact Solder Pin:	Brass, Tin Plated
Wire Retention Spring:	Stainless Steel
Insulating Body:	Polyamide, UL94V-0
Electrical	
Voltage Rating:	150 VAC
Current rating:	4 AMPS
Withstand Voltage:	1300 VAC, Test time 60 sec
Wire Range:	22-28 AWG
Mechanical	
Operating Temperature:	-40°C to +105°C -40°F to +221°F
Soldering Temperature:	260°C, 500°F for 5 seconds
Safety Approval:	 US


Part Number Configuration.

EB472-XX-302

Number of Positions Color
3-Orange

(Other Color Options Available)
(Please consult Factory)

MAX NUMBER OF POSITIONS = 8

UNLESS OTHERWISE SPECIFIED BREAK ALL SHARP EDGES AND DEBURR ALL HOLES	TITLE:	
	5.08mm SPACING, SCREWLESS BLOCK	
LIMITS: UNLESS OTHERWISE SPECIFIED HUND.±.02 FRACT.±1/64 THOU.±.005 ANGLE±1°	SCALE	THIS IS A CONFIDENTIAL DRAWING AND MUSTBE TREATED AS SUCH. NO DISTRIBUTION IS ALLOWED WITHOUT WRITTEN APPROVAL BY EBY ELECTRO INC.
 EBY Electro Inc. PLAINVIEW, NY 11803		

IMPORTANT DISCLAIMER: All information provided on this print is for reference. Always perform your own tests and acquire samples and further information to determine product suitability. While we make effort to provide accurate information, we cannot be responsible for errors either of omission or typographical. EBY Electro, Inc. assumes no responsibility for the use or suitability of any product. All products and specifications are subject to change without prior written notice.

METRIC LIMITS
ONE PLACE ±0.3
TWO PLACES ±0.10
ANGLE ±1°

DRAWN JM DATE 08/01/07
CHECKED _____ DATE _____
APPROVED _____ DATE _____

SIZE A DRAWING NUMBER: EB472-XX-302 REV. D