
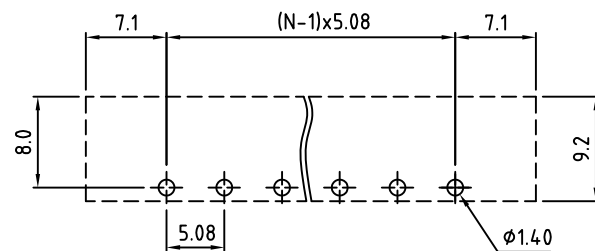


N=Number of Positions



P.C.B. Layout

| Material: | |
|------------------------|------------------------------------|
| Contact Solder Pin: | Copper, Tin Plated |
| Insulating Body: | Polyamide, UL94V-0 |
| Flange Nut: | M2.5, Brass |
| Electrical | |
| Voltage Rating: | 300 VAC |
| Current rating: | 10 AMPS |
| Withstand Voltage: | 1500 VAC, Test time 60 seconds |
| Mechanical | |
| Operating Temperature: | -40°C to +105°C -40°F to +221°F |
| Soldering Temperature: | 260°C, 500°F for 5 seconds max. |
| Safety Approval: | UL |

Part Number Configuration.

HC1548M-XX-500

Number of Positions: 15
Color: 5-Green

(Other Color Options Available)
(Please consult Factory)

Max Number of Positions = 24

| | |
|--|---|
| UNLESS OTHERWISE SPECIFIED BREAK ALL SHARP EDGES AND DEBURR ALL HOLES | TITLE: 5.08mm SPACING, PLUGGABLE HEADER |
| LIMITS: UNLESS OTHERWISE SPECIFIED HUND.±.02 FRACT.±1/64 THOU.±.005 ANGLE±1° | SCALE: THIS IS A CONFIDENTIAL DRAWING AND MUSTBE TREATED AS SUCH. NO DISTRIBUTION IS ALLOWED WITHOUT WRITTEN APPROVAL BY EBY ELECTRO INC. |
| | |
| PLAINVIEW, NY 11803 | |

IMPORTANT DISCLAIMER: All information provided on this print is for reference. Always perform your own tests and acquire samples and further information to determine product suitability. While we make effort to provide accurate information, we cannot be responsible for errors either of omission or typographical. EBY Electro, Inc. assumes no responsibility for the use or suitability of any product. All products and specifications are subject to change without prior written notice.

| | | | | | |
|--|--|--|---------|-----------------------------------|---------|
| METRIC LIMITS ONE PLACE ±0.3 TWO PLACES ±0.10 ANGLE ±1° | DRAWN: JM CHECKED: _____ APPROVED: _____ | DATE: 11/07/08 DATE: _____ DATE: _____ | SIZE: A | DRAWING NUMBER: HC1548M-XX-500 | REV.: A |
|--|--|--|---------|-----------------------------------|---------|