

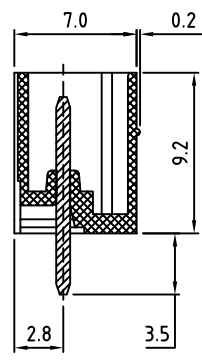
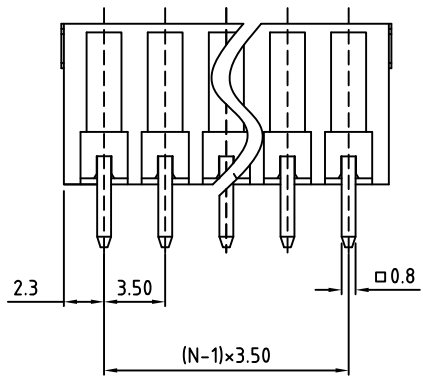


RoHS Compliant

Rev.	ECO#	Date	By
F	1320-0419	04/12/19	MWP

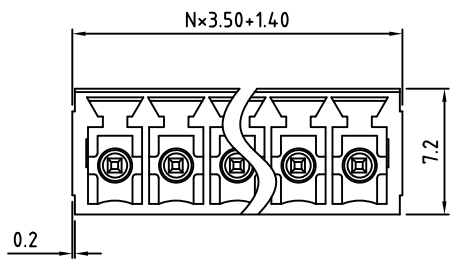


N=Number of Positions

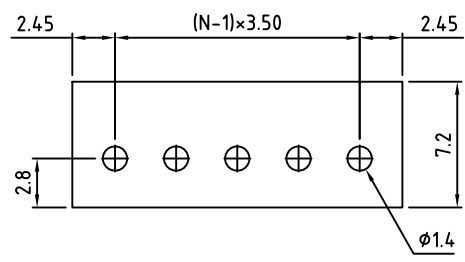

Material:	
Contact Solder Pin:	Copper, Tin Plated
Insulating Body:	Polyamide, UL94V-0
Electrical	
Voltage Rating:	300 VAC
Current rating:	10 AMPS
Withstand Voltage:	1500 VAC, Test time 60 seconds
Mechanical	
Operating Temperature:	-40°C to +105°C -40°F to +221°F
Soldering Temperature:	260°C, 500°F for 5 seconds max. High Temp plastic suitable for reflow
Safety Approval:	US

Part Number Configuration.

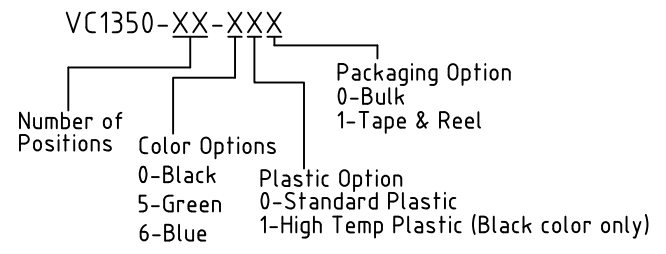

(Other Color Options Available)  
Please consult Factory

Number of Positions = 24 All Dimensions in Millimeters

TITLE: 3.50mm SPACING, PLUGGABLE HEADER

METRIC LIMITS ONE PLACE ±0.3 TWO PLACES ±0.10 ANGLE ± 1°	SCALE	THIS IS A CONFIDENTIAL DRAWING AND MUSTBE TREATED AS SUCH. NO DISTRIBUTION IS ALLOWED WITHOUT WRITTEN APPROVAL BY EBV ELECTRO INC.	 PLAINVIEW, NY 11803
---	-------	--	-------------------------

DRAWN JM	DATE 12/17/07	SIZE A	DRAWING NUMBER: VC1350-XX-XXX	REV. F
CHECKED	DATE			
APPROVED	DATE			

IMPORTANT DISCLAIMER: All information provided on this print is for reference. Always perform your own tests and acquire samples and further information to determine product suitability. While we make effort to provide accurate information, we cannot be responsible for errors either of omission or typographical. EBV Electro, Inc. assumes no responsibility for the use or suitability of any product. All products and specifications are subject to change without prior written notice.