

RoHS Compliant

Rev.

ECO#

Date



By

A


1580-0624

06/25/24


MWP

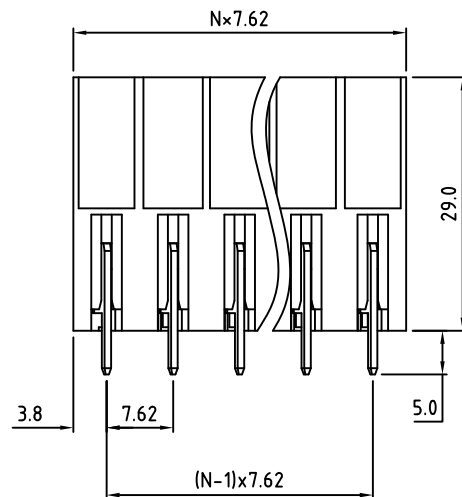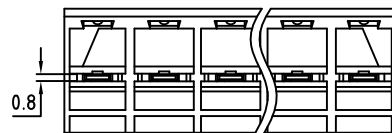

N=Number of Positions

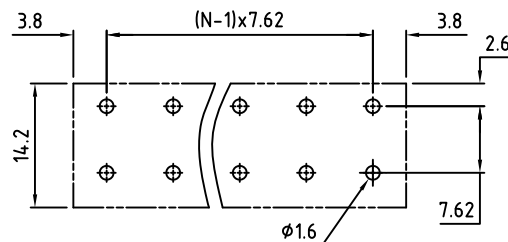

Recommended PCB Layout

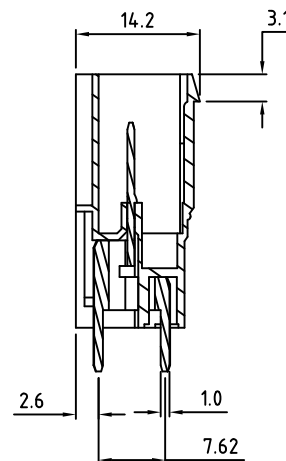

## Material:

Contact Solder Pin: Copper, Tin Plated

Insulating Body: Thermoplastic, UL94V-0

## Electrical

Voltage Rating: 300 VAC

Current rating: 32 AMPS

Withstand Voltage: 1600 VAC, Test time 60 seconds

## Mechanical

Operating Temperature: -40°C to +115°C  
-40°F to +239°F

Soldering Temperature: 260°C, 500°F for 5 seconds max.

Safety Approval: CSA US

Part Number Configuration.

VC1768-XX-500

Number of  
PositionsColor  
5-Green(Other Color Options Available)  
(Please consult Factory)

Max Number of Positions = 16

All Dimensions in Millimeters

TITLE: 7.62mm SPACING, PLUGGABLE HEADER

METRIC LIMITS  
ONE PLACE  $\pm 0.3$   
TWO PLACES  $\pm 0.10$   
ANGLE  $\pm 1^\circ$ 

SCALE

THIS IS A CONFIDENTIAL DRAWING AND  
MUST BE TREATED AS SUCH. NO  
DISTRIBUTION IS ALLOWED WITHOUT  
WRITTEN APPROVAL BY EBY ELECTRO INC.

Amphenol

EBY Electro Inc.  
PLAINVIEW, NY 11803DRAWN JM  
CHECKEDDATE 10/21/08  
DATESIZE  
A

DRAWING NUMBER:

VC1768-XX-500

REV.

A

IMPORTANT DISCLAIMER: All information provided on this print is for reference. Always perform your own tests and acquire samples and further information to determine product suitability. While we make effort to provide accurate information, we cannot be responsible for errors either of omission or typographical. EBY Electro, Inc. assumes no responsibility for the use or suitability of any product. All products and specifications are subject to change without prior written notice.