

RoHS Compliant

Rev.

ECO#

Date


By

B


1592-0924

09/27/24

MWP

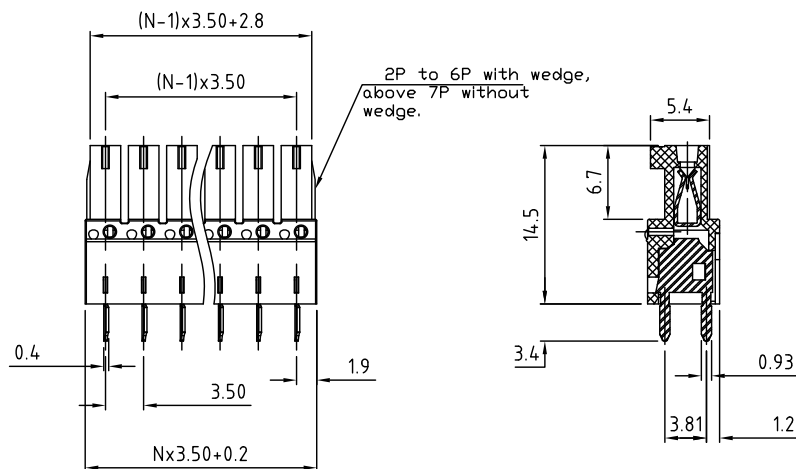

N=Number of Positions

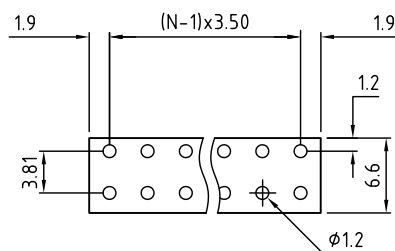

Recommended P.C.B. Layout

Material:

Contact: PhBz, Tin Plated

Insulating Body: Polyamide, UL94V-0

Electrical

Voltage Rating: 300 VAC

Current rating: 8 AMPS

Withstand Voltage: 1500 VAC, Test time 60 seconds

Mechanical

Operating Temperature: -40°C to +105°C
-40°F to +221°F

Soldering Temperature: 260°C, 500°F for 5 seconds max.

Safety Approval:



Part Number Configuration.

VM350-XX-X00

Number of
PositionsColor Options
0-Black
5-Green
6-Blue(Other Color Options Available)
(Please consult Factory)

Number of Positions = 24

All Dimensions in Millimeters

TITLE: 3.50mm SPACING, PLUGGABLE HEADER

METRIC LIMITS
ONE PLACE ± 0.3
TWO PLACES ± 0.10
ANGLE $\pm 1^\circ$

SCALE

THIS IS A CONFIDENTIAL DRAWING AND
MUST BE TREATED AS SUCH. NO
DISTRIBUTION IS ALLOWED WITHOUT
WRITTEN APPROVAL BY EBY ELECTRO INC.

Amphenol

Electro Inc.
PLAINVIEW, NY 11803DRAWN JM
CHECKED
APPROVED DATE 12/17/07
DATE
DATE SIZE
A

DRAWING NUMBER:

VM350-XX-X00

REV.

B

IMPORTANT DISCLAIMER: All information provided on this print is for reference. Always perform your own tests and acquire samples and further information to determine product suitability. While we make effort to provide accurate information, we cannot be responsible for errors either of omission or typographical. EBY Electro, Inc. assumes no responsibility for the use or suitability of any product. All products and specifications are subject to change without prior written notice.