




Rev.	ECO#	Date	Ву
D	1471–1021	10/13/21	MWP

Material:



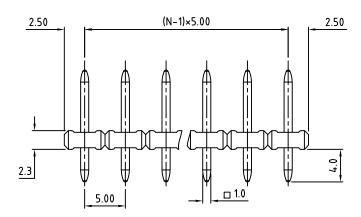



Contact Solder Pin: Brass, Tin Plated
Insulating Body: Polyamide, UL94V-0

Electrical

Voltage Rating: 300 VAC

Current rating: 15 AMPS

Withstand Voltage: 1500 VAC, Test time 60 seconds


Mechanical

Operating Temperature: -40°C to +105°C
-40°F to +221°F

Soldering Temperature: 260°C, 500°F for 5 seconds max.


Safety Approval: CSUUS

N=Number of Positions

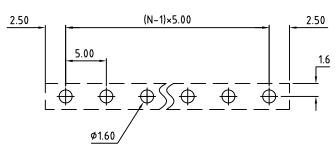

P.C.B. Layout

Part Number Configuration.



(Other Color Options Available) Please consult Factory

Max Number of Positions = 24

UNLESS OTHERWISE SPECIFIED BREAK ALL SHARP EDGES AND DEBURR ALL HOLES

TITLE:

5.00mm SPACING, PIN STRIP

LIMITS: UNLESS

OTHERWISED SPECIFIED

HUND.±.02 FRACT.±1/64

THOU.±.005 ANGLE±1°

SCALE THIS IS A CONFIDENTIAL DRAWING AND MUSTBE TREATED AS SUCH. NO DISTRIBUTION IS ALLOWED WITHOUT WRITTEN APPROVAL BY EBY ELECTRO INC.

Electro Inc.
PLAINVIEW, NY 11803

IMPORTANT DISCLAIMER: All information provided on this print is for reference. Always perform your own tests and acquire samples and further information to determine product suitability. While we make effort to provide accurate information, we cannot be responsible for errors either of omission or typographical. EBY Electro, Inc. assumes no responsibility for the use or suitability of any product. All products and specifications are subject to change without prior written notice.

es METRIC LIMITS
be ONE PLACE ±0.3
TWO PLACES ±0.10
ANGLE ± 1°

DRAWN JM DATE
CHECKED DATE
APPROVED DATE

RAWING NUMBER:
PS570-XX-000

REV.